# GJFJY-INSIDE 0.9MM 4-48 CORES

# Optical Fiber Cable

# Application:

Model	Fiber account	OD (mm)	Nominal Weight (kg/km)	Max.Tension (N)		Max. Crushing Resistance (N/100)	
				Short-term	Long-term	Short-term	Long-term
GJFJV(Y)	4	4.8+-0.2	18	270	90	90	90
GJFJV(Y)	6	5.2+-0.2	23	330	110	110	110
GJFJV(Y)	8	6.2+-0.2	29	480	160	160	160
GJFJV(Y)	12	6.8+-0.3	37	600	200	200	200
GJFJV(Y)	24	8.4+-0.5	61	720	240	240	240
GJFJV(Y)	48	12.5+-0.5	121	1600	520	520	520

The true weight of optical cable may had some tolerance with the above stated value.

Temperature range: Storage or transportation: -20~70 °C / Operation: -20~70 °C

### Package and shipping mark


Printing at outjacket of optical cable

White color printing words at each meter distance, standard printing content as following, also can match the customer require for the printing content

- 1. Meter mark
- 2. Style of optical cable and fiber account
- 3. Manufacturer name
- Manufacture date

#### Section picture of optical cable

#### Description

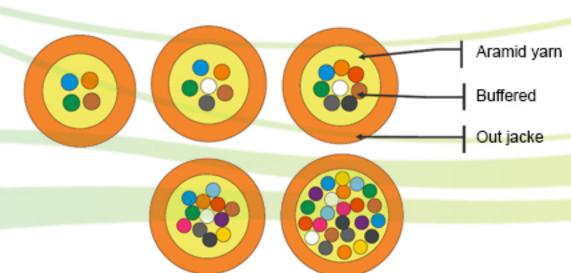

## Package of optical cable

Standard length is 1KM ,other length can negotiate

Can be packed in wooden drum or plywood drum

#### Wooden drum

Label will be sticked at wooden drum, content as following

- Style of optical cable and fiber account
- 2. Length
- 3. Gross weight KGS
- Total drums amount
- 5.Manufacture date
- The following information also will be exposed at the wooden drum
  - a. Rolling direction
  - Optical cable rolling tightly with the wooden drum, in order to prevent it will be broken during transportation process.