

EN-DVI20B-70




Features

- ◆ Vandalproof IR Dome Camera
- ◆ SONY Ex-view CCD (ICX673AK/672AK)
- ◆ 21 pcs $\varnothing$ 5mm IR-LED, IR Range 20M
- ◆ OSD/2D-DNR/BLC/MD/Privacy Masking
- ◆ Built-in 4-9mm Manual zoom Lens



OSD Button in the cable




OSD Menu Control

Specifications

Model Name	EN-DVI20B-70
Image Device	1/3" Ex-view CCD
Resolution	Color Mode: 650TVL; B/W Mode:700TVL
CCD Sensor	PAL:SONY ICX673AK; NTSC:SONY ICX672AK
DSP Device	SONY Effio-E (CXD4140GG)
Picture Elements	PAL:976(H)×582(V) ; NTSC:976(H)×494(V)
Min. Illumination	0.01 Lux (F2.0)/ 0 Lux IR On
Lens Furnished	4-9mm Manual Zoom Lens (2.8-12mm is Optional)
TV System	PAL/NTSC
Infrared Luminary	21 pieces $\varnothing$ 5 mm IR-LED
Illuminate Distance	20 M
Wavelength	850 nm
Electronic Shutter	NTSC:1/60~1/100,000, PAL:1/50~1/110,000
S/N Ratio	More than 52dB(AGC OFF)
Gamma	0.45
OSD Menu	Yes
Exposure	Auto
2DNR	OFF/ON
D-WDR	ON / OFF
ATR	ON / OFF
Gain Control	Auto / OFF / LOW / MIDDLE / HIGH
White Balance	ATW / User1/User2
Backlight	WDR/BLC/HLC/OFF selectable
Pict Adjust	Mirror/Brightness/Contrast/Sharpness/Hue/Gain

Motion Detect	OFF/ON(Detect sense/ Area Sel)
Peivacy Masking	OFF/ON (4 Zone)
Day&Night	True Day and Night (Auto/ Day / Night / Ext. D&N)
Sync. System	Internal
Video Output	1 Vp-p / 75 Ohms
Power Supply	DC12V±10%
Operation Temperature	-10℃ ~ +50℃ RH95% Max
Dimension	φ146 x 89 mm
Weight	1200g

Size Chart

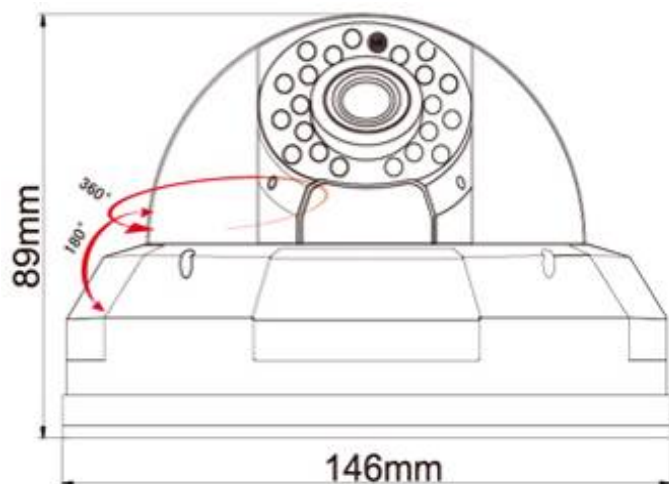

Design and specifications are subject to change without notice.