



PREMIERLINE
INFINITY NETWORK CABLING SOLUTIONS



AD server
cabinets

Catalog book



Model No.
K8.6642.9200

W*D
600 *600

Capacity
42U



Standard

Comply with ANSI/EIA RS-310-D、IEC297-2、DIN41494；
PART1、DIN41494; PART7 Standard.



Spring Lock, High-density vented door enable protection, ventilation and reliable operation, the ventilated rate is 71%




Code lock (Optional)

Feature

- Hexagonal reticular high-density vented front door (patent) & rear door for protection, ventilation and reliable operation;
- Exquisite image (patent) with precise dimension and craftsmanship;
- Lockable cable entry on top cover and bottom panel with adjustable sizes ;
- Optional plinth enables cabinets to stay in a fixed position while meeting requirements of under-base wiring/ventilation and rat prevention ;
- Strong cabinet connection by baying kit (patent) ;
- Spring lock ;
- Blue Zinc Mounjting Profiles,free of static .



Main Dimension

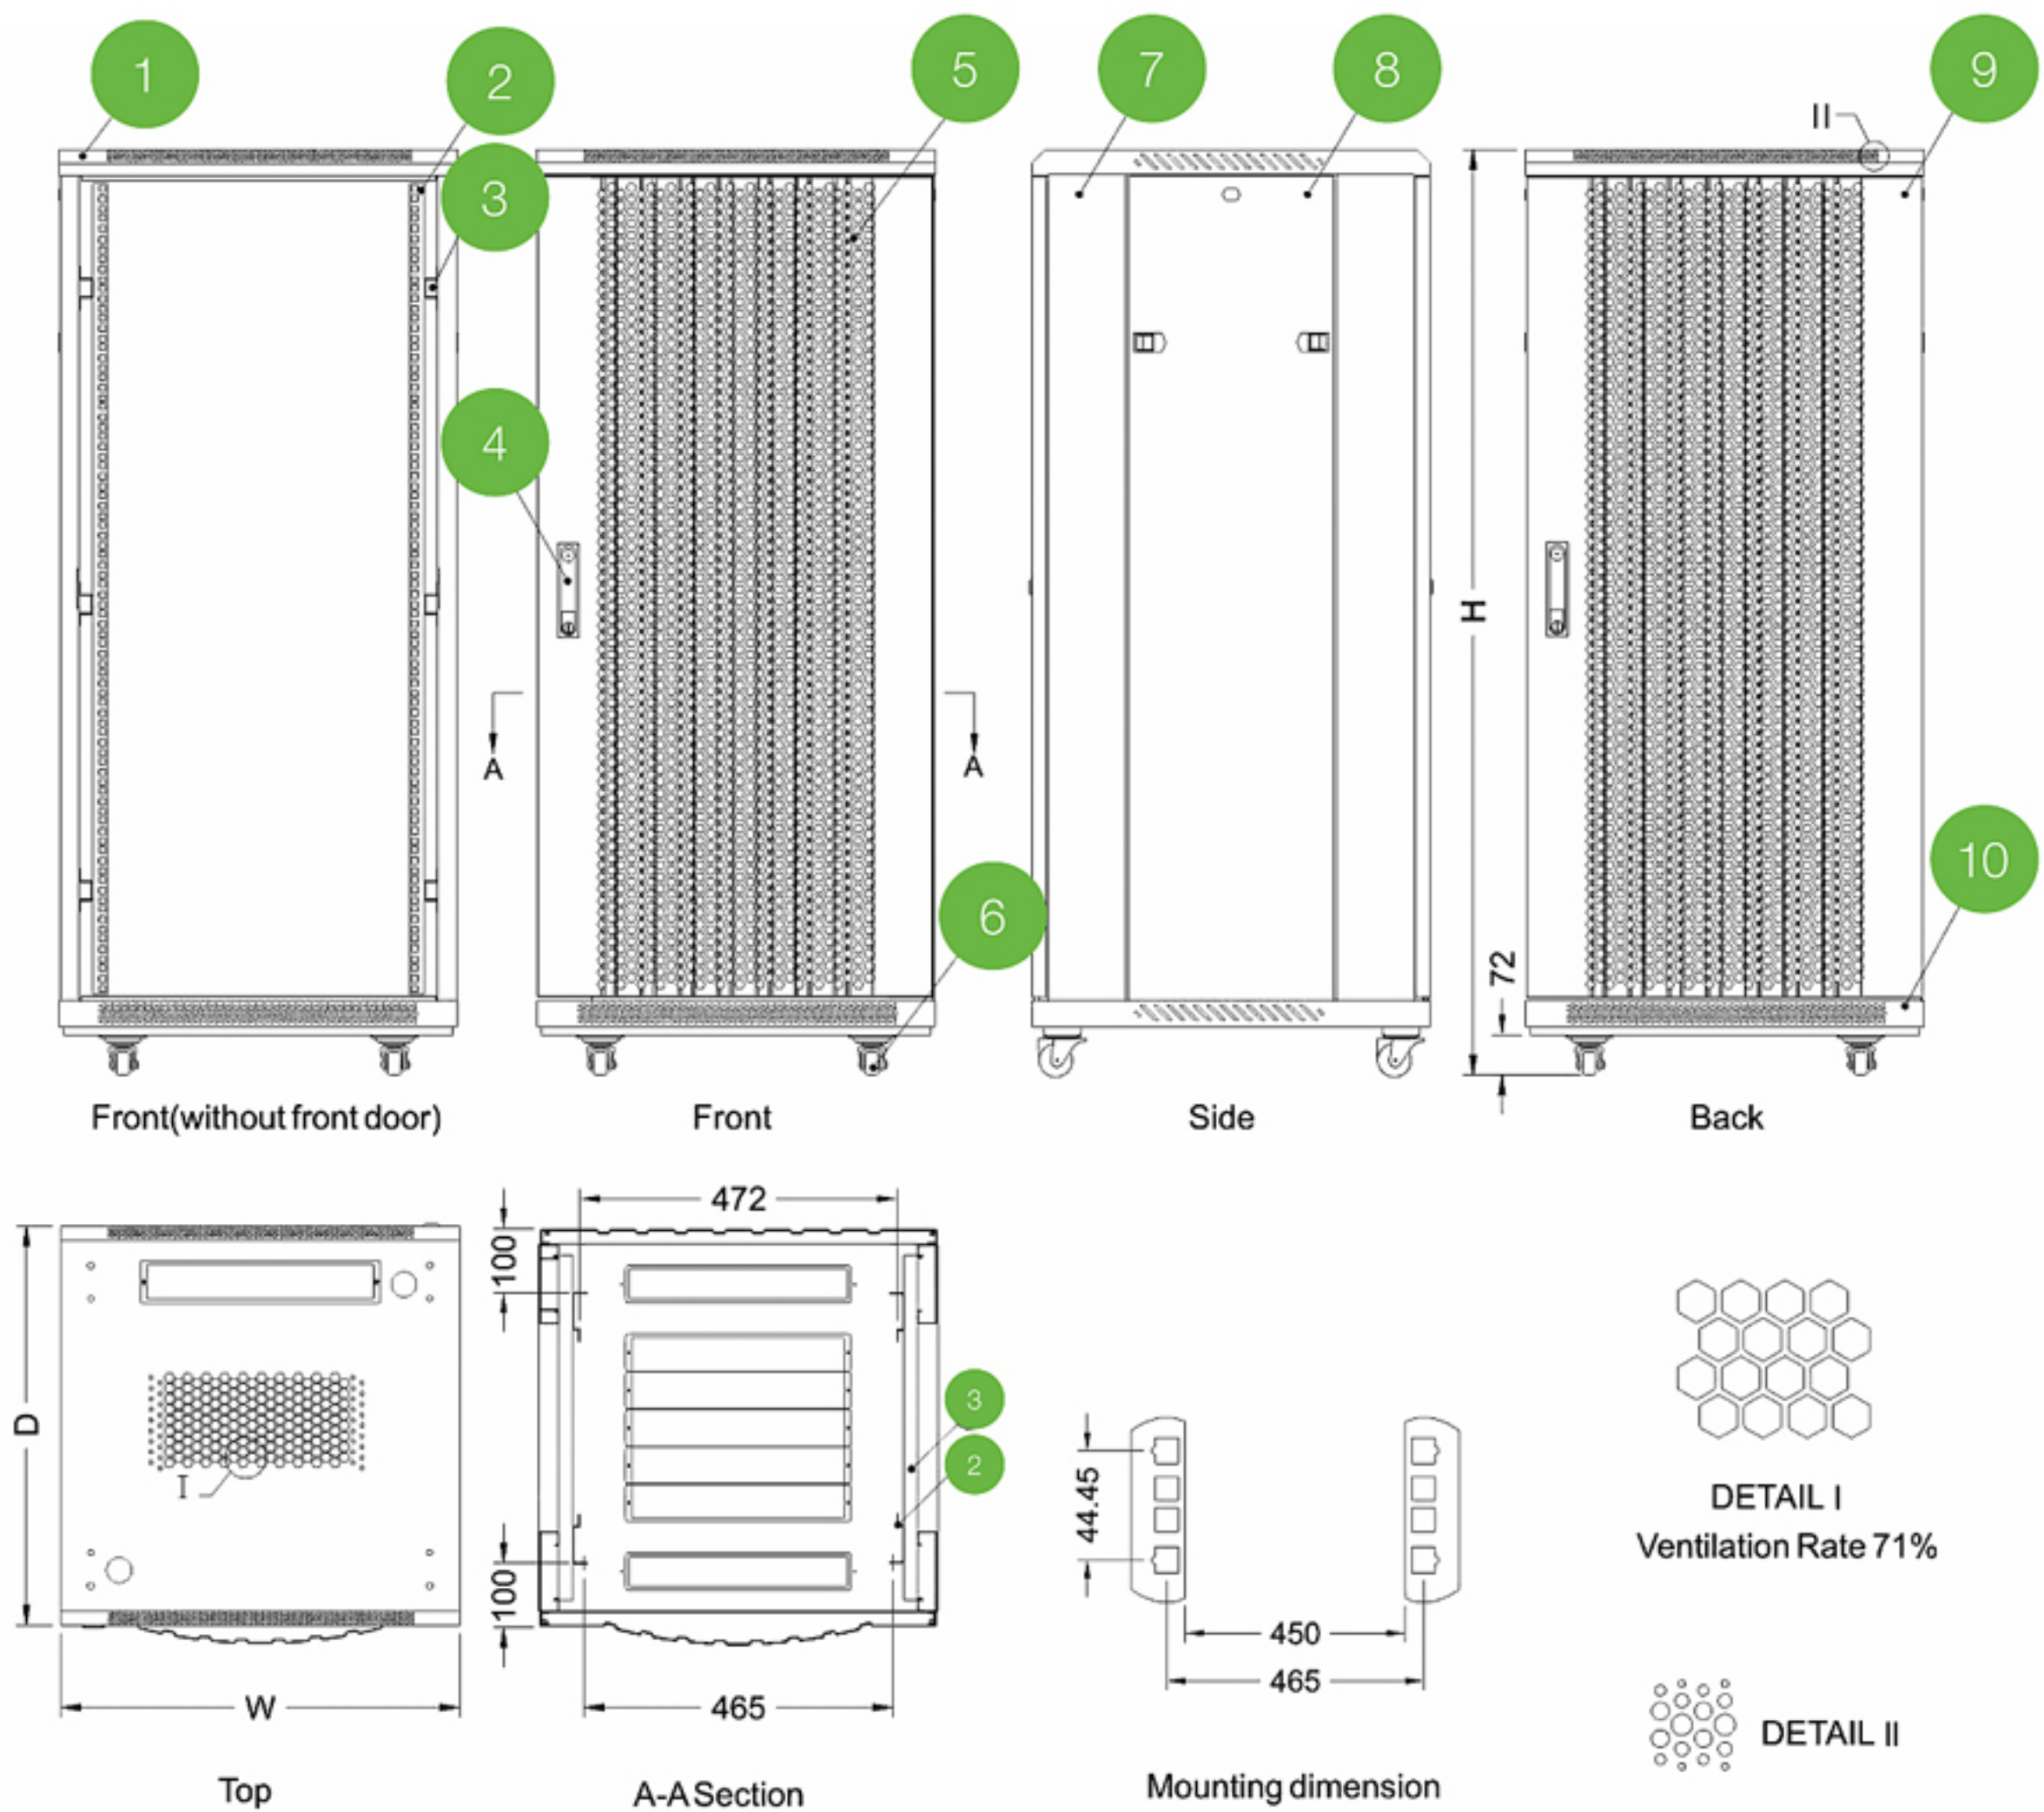



Accessories



Fixed Shelf

Fixed shelf:

- Used for placing equipment


Material:

- SPCC Cold rolled steel t1.2.

Surface Finish:

- Degreasing, phosphoric, powder coated.

Dimension

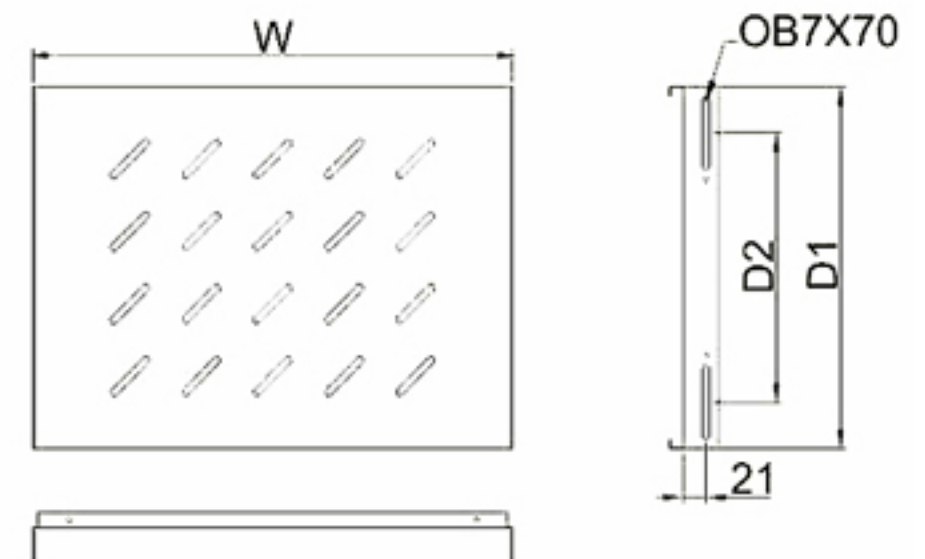

Loading Capacity

- 60kg

Colour

- RAL9004
- RAL7035


Definition of Colour

- SA. 01:RAL9004
- SA.00:RAL7035

Model No.	Specification	Dimension (mm)			Use
		W	D1	D2	
SA.0160.19■ ■	60 Fixed shelf	472	350	260	19" installation for 600-depth cabinets
SA.0180.19■ ■	80 Fixed shelf	472	550	460	19" installation for 800-depth cabinets
SA.0190.19■ ■	90 Fixed shelf	472	650	560	19" installation for 900-depth cabinets
SA.0196.19■ ■	96 Fixed shelf	472	730	640	19" installation for 960/1000-depth cabinets
SA.0160.27■ ■	60 Extra-fixed shelf	672	350	260	27" installation for 600-depth cabinets, remove cable management slot and spacer
SA.0180.27■ ■	80 Extra-fixed shelf	672	550	460	27" installation for 800-depth cabinets, remove cable management slot and spacer
SA.0190.27■ ■	90 Extra-fixed shelf	672	650	560	27" installation for 900-depth cabinets, remove cable management slot and spacer
SA.0196.27■ ■	96 Extra-fixed shelf	672	730	640	27" installation for 960/ 1000-depth cabinets, remove cable management slot and spacer



Dimension

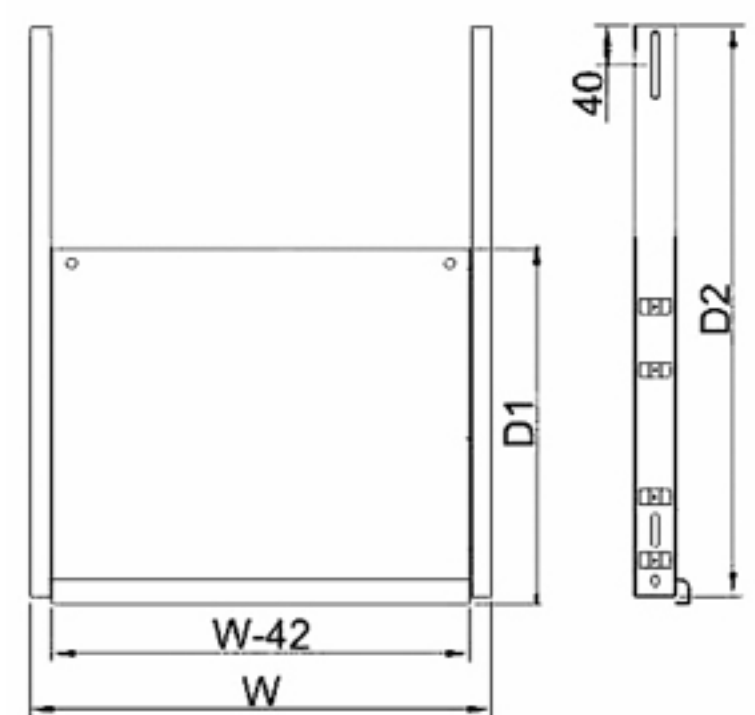

Keyboard Panel

Material:

- SPCC Cold rolled steel t1.2/14"2-section slide.

Surface Finish:


- Degreasing, phosphoric:, powder coated.

Parameter:

- Flexing length : 210mm Loading capacity: 20kg

Definition of Colour

- SA. 01:RAL9004
- SA.00:RAL7035

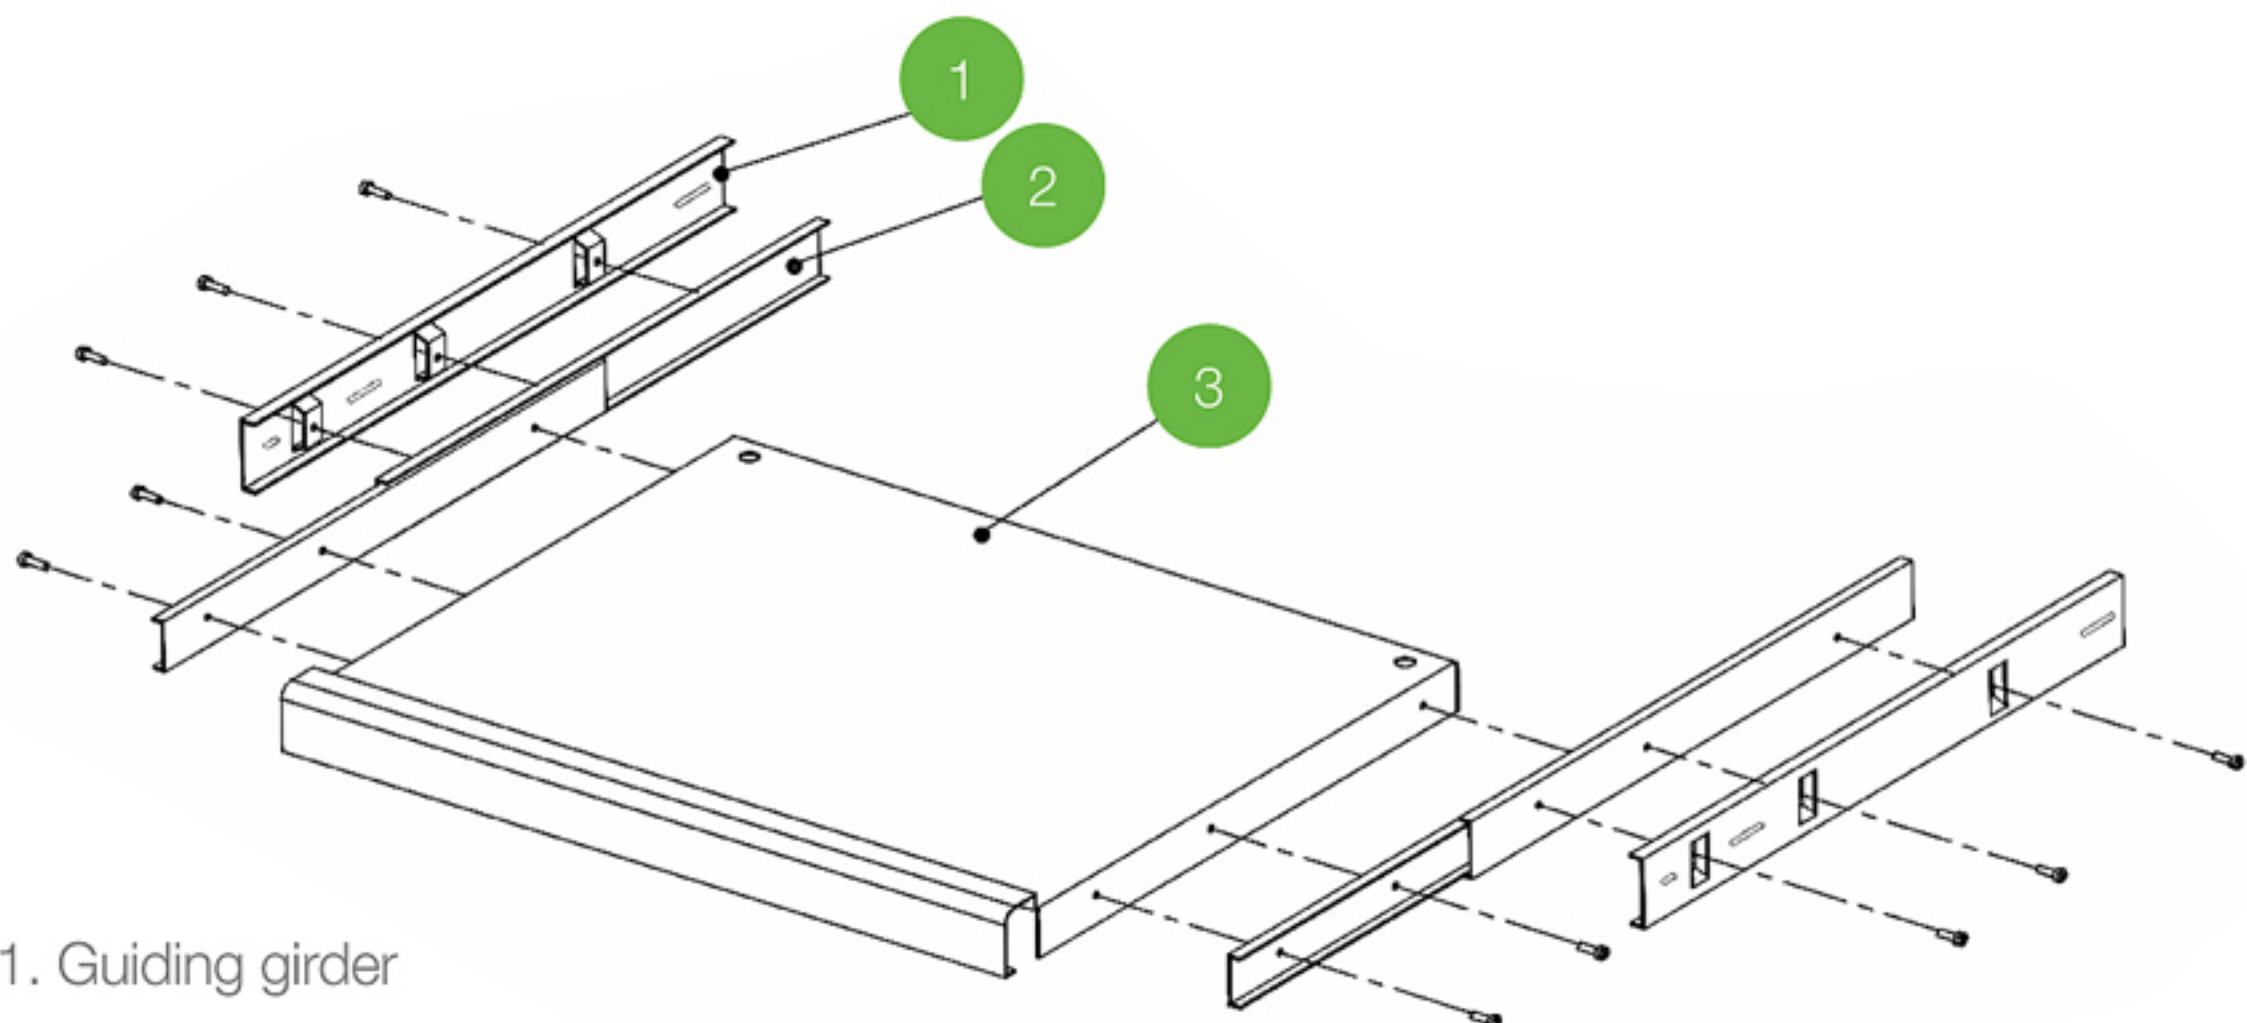

1. Guiding girder

2. 14" 2-section slide

3. Keyboard loading plate





Keyboard Panel

Model No.	Specification	Dimension (mm)			Use
		W	D1	D2	
SA.0760.19 ■ ■	60 Keyboard tray	472	358.8	350	19" installation for 600-depth cabinets
SA.0780.19 ■ ■	80 Keyboard tray	472	358.8	550	19" installation for 800-depth cabinets
SA.0790.19 ■ ■	90 Keyboard tray	472	358.8	650	19" installation for 900-depth cabinets
SA.0796.19 ■ ■	96 Keyboard tray	472	358.8	730	19" installation for 960/1000-depth cabinets
SA.0760.27 ■ ■	60 Extra-width Keyboard tray	672	358.8	350	27" installation for 600-depth cabinets, remove cable management slot and spacer
SA.0780.27 ■ ■	80 Extra-width Keyboard tray	672	358.8	550	27" installation for 800-depth cabinets, remove cable management slot and spacer
SA.0790.27 ■ ■	90 Extra-width Keyboard tray	672	358.8	650	27" installation for 900-depth cabinets, remove cable management slot and spacer
SA.0796.27 ■ ■	96 Extra-width Keyboard tray	672	358.8	730	27" installation for 960/ 1000-depth cabinets, remove cable management slot and spacer



Fan Unit

Dimension

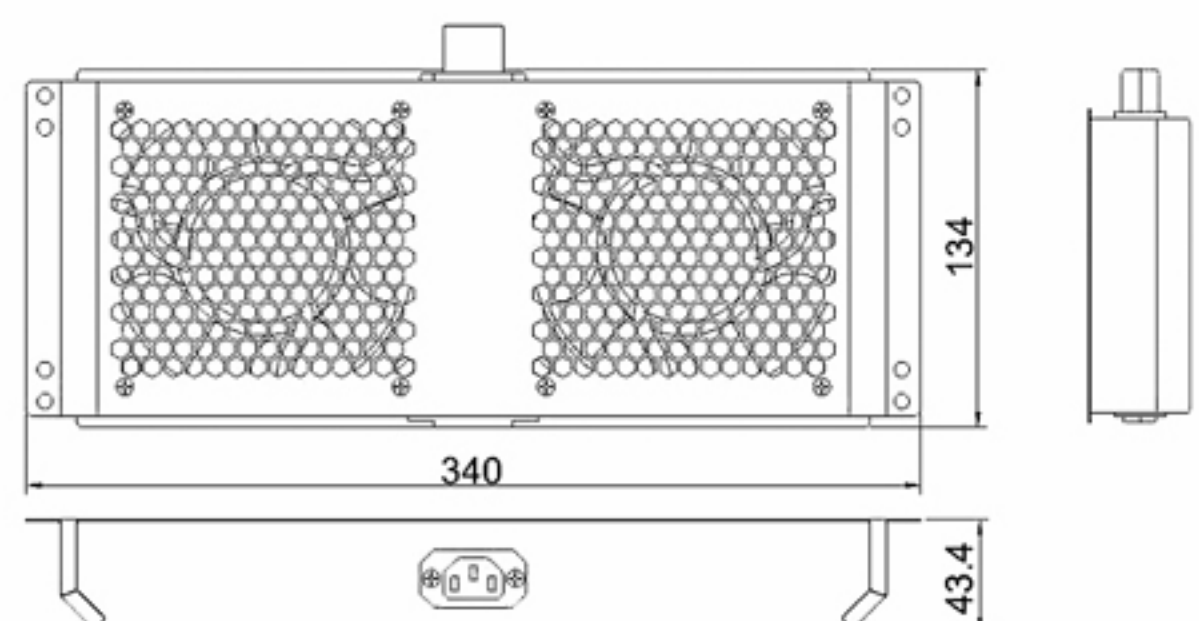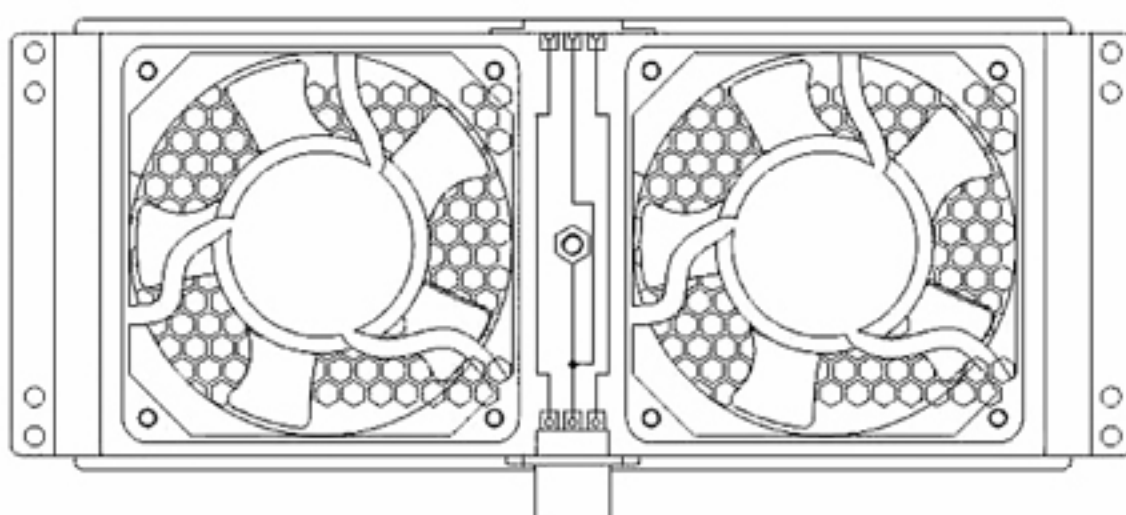



Fan Unit

▼ Specification:

Model No.	Use
SA.6502.0■■■■	Fan unit for cabinet:2fans

▼ Specification of plug of wire:

Model No.	Type of wire	V	A
SA.■■■■■.■1■■■	All-usega	220V	10A
SA.■■■■■.■2■■■	UL	110V	10A
SA.■■■■■.■3■■■	Germany	220V	16A
SA.■■■■■.■4■■■	UK	220V	13A

▼ Definition of colour:

Model No.	Use
SA.■■■■■.■■■01	RAL9004
SA.■■■■■.■■■00	RAL7035

▼ Definition of colour:

RAL9004	RAL7035
black	gray
	



Fan Unit



Material:

- SPCC Cold rolled steel

Thickness:


- Power cord box : 0.8mm;

Surface Finish:

- Degreasing, phosphoric, powder coated.

Colour:

- RAL9004 RAL7035

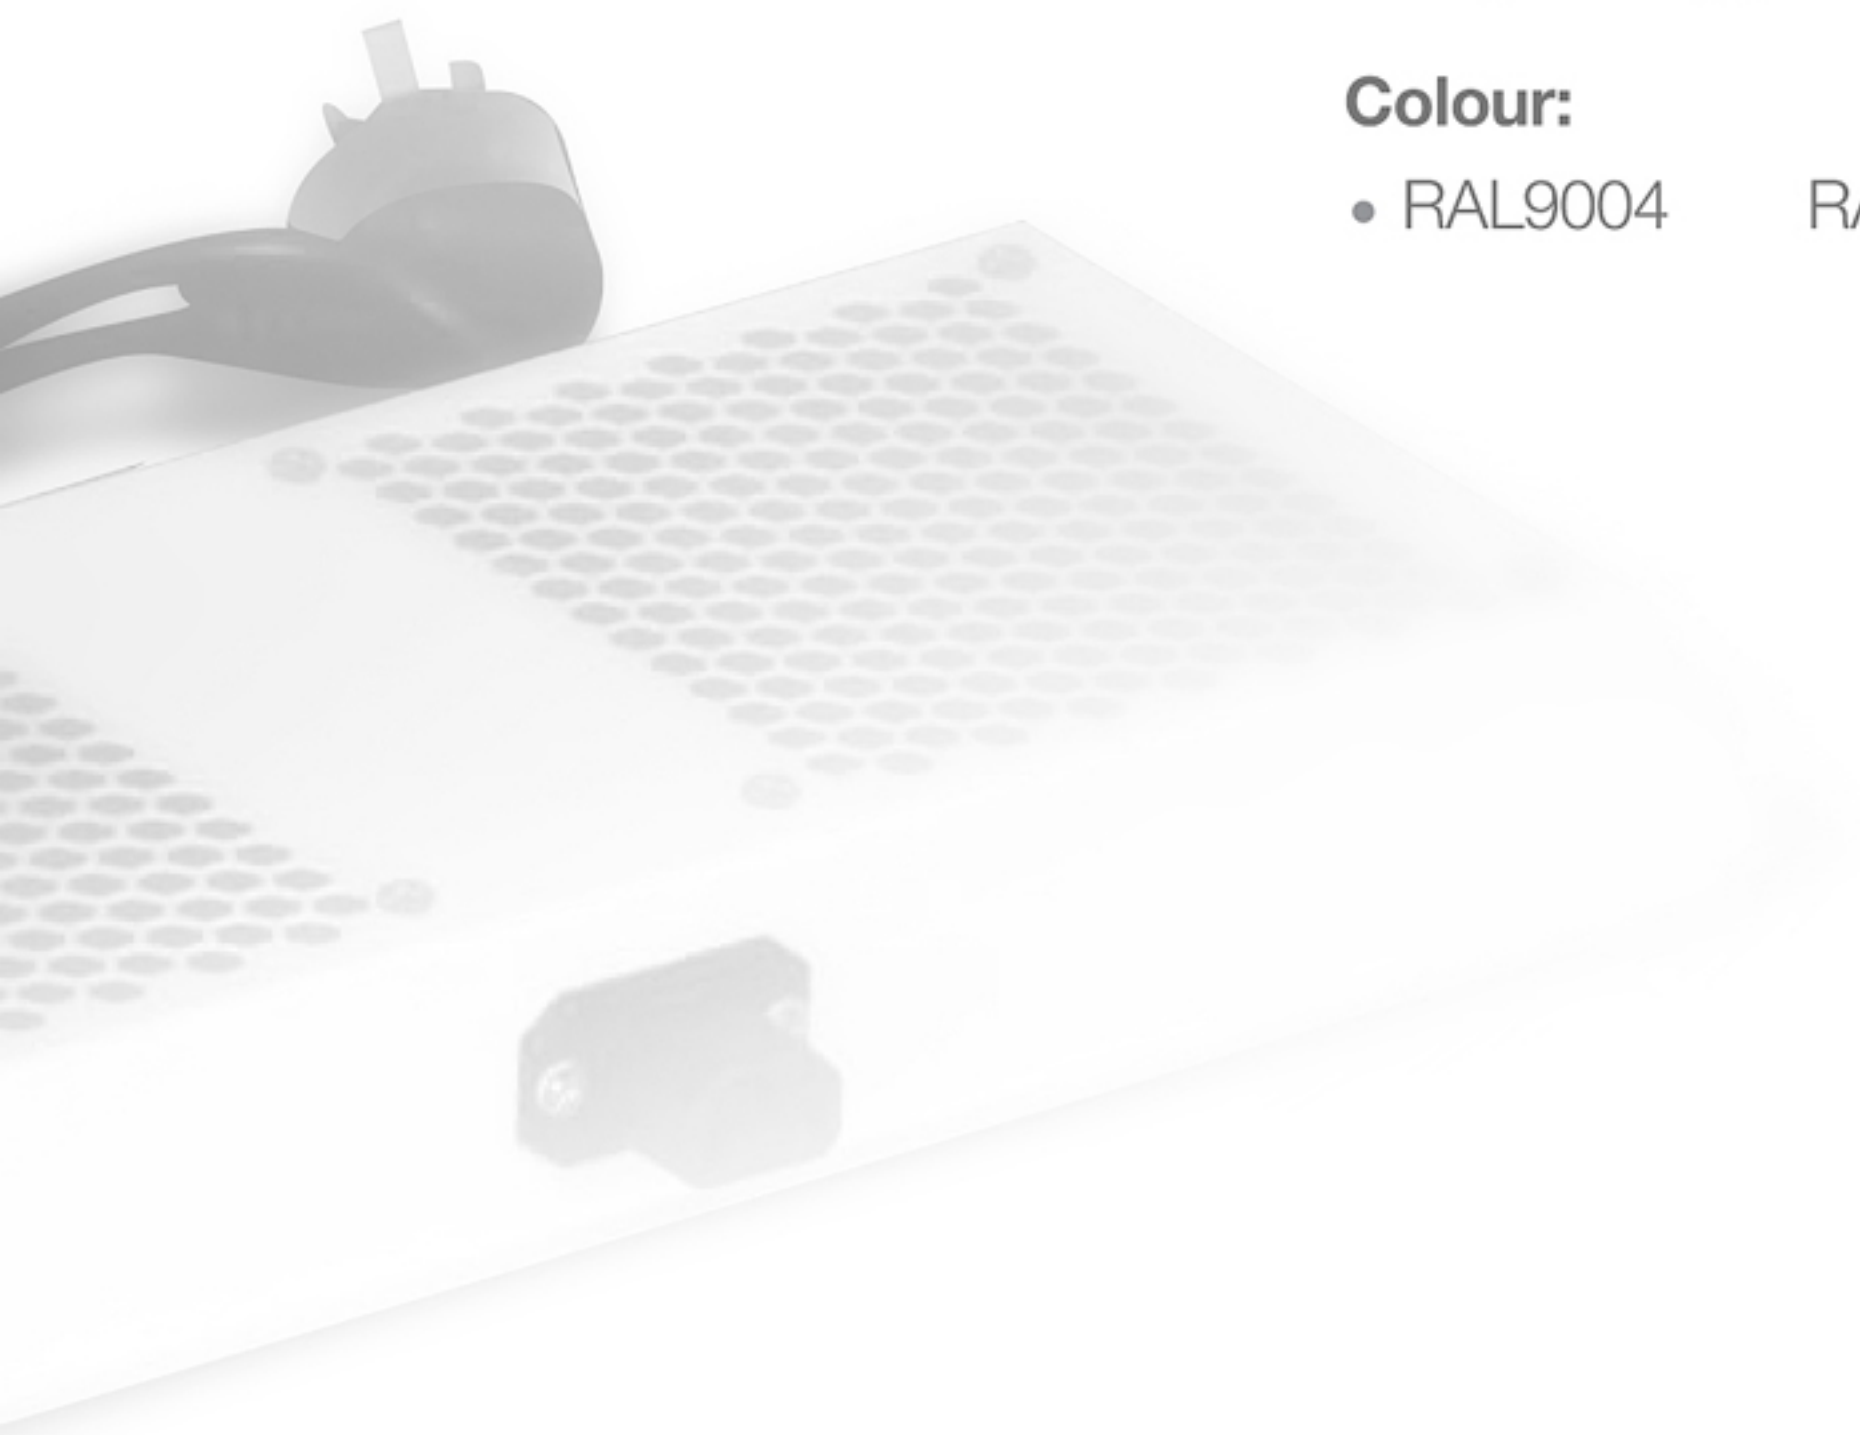



PREMIERLINE
INFINITY NETWORK CABLING SOLUTIONS



AD server cabinets

Model No.	Capacity	W*D
K8.6042.9001	42U	600 * 1000

OrderNow!

www.premierline-cabling.com